
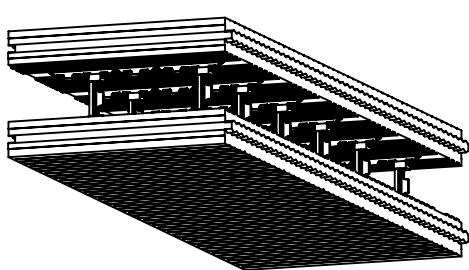


CONCRETE LENGTH TOLERANCE MAY VARY DUE TO CURING AND TEMPERATURE BY 2mm

1219


101mm CONNECTOR

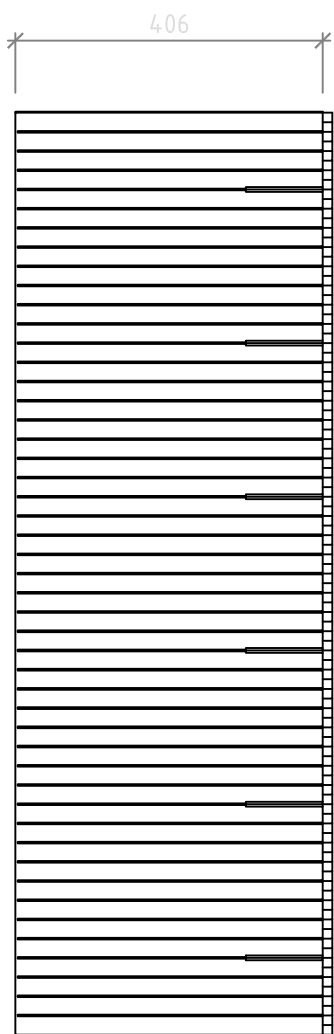

NOTE:

IT IS THE RESPONSIBILITY OF THE DESIGNER / END USER TO VERIFY THAT STRUCTURES BUILT WITH ECO-BLOCK HAVE BEEN DESIGNED, ENGINEERED, AND CONSTRUCTED IN ACCORDANCE WITH ALL APPLICABLE BUILDING CODES AND REGULATIONS

BLOCK SHOWN HAS CONNECTORS ARRANGED FOR UPPER COURSES.
FOR FIRST COURSE PLACE A ROW OF CONNECTORS AT THE 1, 3, AND 5 TEE LOCATIONS
WALL SURFACE AREA = 0.5 SQ. M PER BLOCK
CONCRETE VOLUME = 0.05 CU. M PER BLOCK

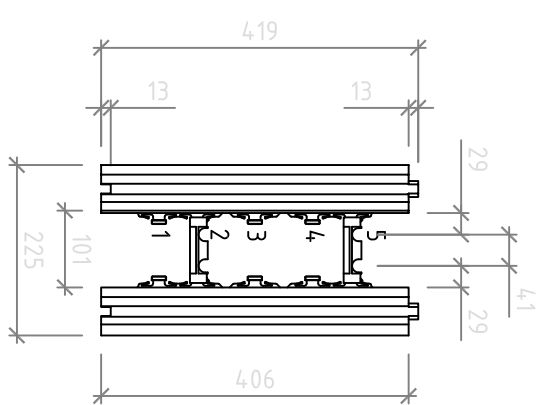

ECO-Block, Pty Ltd

INSULATING CONCRETE FORMS
"... *SAVING AUSTRALIAN ENERGY* "™

34 Gracemere St.
Newmarket QLD 4051
www.eco-blockaustralia.com.au

ECO-BLOCK 230 SERIES FORMS
STRAIGHT PANEL
101mm CONCRETE CORE
(ECO-BLOCK 230 SERIES)

DATE: 5/2009

SCALE: 1:10

REVISION: -

DRAWING NUMBER:

M-10-001